



**GX80<sup>®</sup>**

**PRODUCT CATALOGUE**

# PRODUCT CATALOGUE

## TABLE OF CONTENTS

### MULTI-PURPOSE LUBRICANTS CX80

• MAINTENANCE AND REPAIRS	3
• MAINTENANCE AND REPAIRS • TEFLON™	3

### GREASES CX80

• COPPER GREASE	4
• LITHIUM GREASE	4
• MOLYBDENUM GREASE	5
• CERACX GREASE	5
• CERACX LC GREASE	5
• GRAPHITE GREASE	6
• BEARING GREASE	6
• WATERPROOF GREASE	7
• MOTO CHAIN	7
• WHITE GREASE	7
• ELECTRICX GREASE	7
• SILICONE GREASE	8
• ALUMINIUM GREASE	8
• GREASE FOR BRAKES	8
• GREASE FOR GATES	9
• TOWOCX GREASE	9
• KERAMICX GREASE	9
• SILIKON SPRAY	10
• DRY LUBRICANT • TEFLON®	10
• GEAR AND STEEL WIRE ROPE LUBRICANT	10
• ACX FOOD GREASE	10
• GREASE FOR COFFEE MACHINES	11
• PENETRATING GREASE	11
• CHAIN LUBE	11
• LOCK LUBE	11

### HIGH TEMPERATURE SILICONES CX80

• PROFESSIONAL SILICONE	12
• PROFESSIONAL ECO SILICONE	13
• FIRESTOP SEALANT	13

### SILICONES CX80

• MULTI-PURPOSE SILICONE	14
• NEUTRAL SILICONE	14
• SILICX SUPER RTV GLUE FOR SILICONE	14
• FOOD GRADE SEALANT	14

### SELANTS CX80

• FIREPLACE SEALANT	15
---------------------	----

### CYANOACRYLATE ADHESIVES CX80

• PRIMER 77	15
• ACTIVATOR 11	15
• BONDICX 01	16
• BONDICX 05	16
• BONDICX 06	16
• BONDICX 16	16
• BONDICX 20	17
• BONDICX 22	17
• BONDICX 48	17
• BONDICX 60	18
• BONDICX 96	18

### ANAEROBIC ADHESIVES CX80

• RC 03	18
• RC 20 G	18
• RC 21	19
• RC 22	19
• RC 38	19
• RC 41	19
• RC 42	20
• RC 43	20
• RC 48	20
• RC 65	20
• RC 69	21
• RC 70	21
• RC 72	21
• RC 74	21
• RC 77	22

### HYBRID ADHESIVES CX80

• HYBRICX PREMIUM	22
• HYBRICX 35 C	23
• HYBRICX 45 S	23
• HYBRICX 70 S	23

### ECO-ADHESIVES CX80

• ECO BONDICX. CONSTRUCTION ECO-ADHESIVE.	24
• ECO BONDICX. ASSEMBLY ECO-ADHESIVE.	24
• ECO BONDICX. WOOD ECO-ADHESIVE.	24
• ECO BONDICX. ECO-FRIENDLY ACRYLIC SEALANT.	24

### CLEANING PRODUCTS CX80

• XBRAKE CLEANER	25
• CARBU & EGR CLEANER	25
• ENGINE CLEANER	25
• ENGINE CLEANER STRONG	25
• INOX CLEANER	26
• ACTIVE FOAM TRUCK CONCENTRATE	26
• ON RUST	26
• ON RUST MoS <sub>2</sub>	26
• ON RUST ICE	27
• CONTACTX	27
• CONTACTX IPA	27
• CONTACTX PCC	27
• NON-FLAMMABLE AIR DUSTER	28
• AIR DUSTER	28
• CLEANER PROF	28
• LABEL REMOVER	28
• EKO CLEANER	29
• JOINTS AND WELDS	29
• FIREPLACES AND GRILLS	29
• CLEANER	29

### ANTI-CHIPPING, WELDING PRODUCT CX80

• EASY WELD	30
• GAS LEAK DETECTOR	30



#### EPOXY RESINS, SEALANTS CX80

• AUTO WELD. COLD WELDING.	30
• KWIK WELD. COLD WELDING.	30
• STIK WELD	31
• SILV WELD	31

#### OILS CX80

• DACNIX	31
• PNEUMACX ANTIFREEZE	31
• PNEUMACX M	32
• HEALTH OIL SIL100	32

#### CAR PRODUCTS CX80

• STARTING FLUID	32
• FAN BELT SPRAY	32
• MIRROR BOND	33
• WINDOW DEICER	33
• PERM-O-SEAL	33

#### PROTECTIVE COATINGS CX80

• CYNK SPRAY	34
• PROTECTOR METAL	34
• ALUCYNK SPRAY	34
• DRILLING AND THREADING OIL	34
• WAX FOR CLOSED SECTIONS	35
• WAX FOR CHASSIS PROTECTION	35

#### BIKE CARE LINE CX80

• CHAIN LUBE DRY	36
• CHAIN LUBE WET	36
• CHAIN CLEANER	36
• FRAME CLEANER	36

#### CAR CARE LINE CX80

• COCKPIT PROTECTOR • TEFLON®	37
• TIRE PROTECTOR • TEFLON®	37
• RIM CLEANER	37
• INSECT REMOVER	37

**CX80 MAINTENANCE AND REPAIRS**

The specially formulated multi-purpose product is made from the highest quality raw materials.

**PROPERTIES:** loosens rusted and tilted elements quickly • cleans and protects equipment from corrosion • eliminates squeaking and creaking of hinges, locks, curtain rods and other mechanical devices • improves the function of ignition systems, which are endangered with flooding or humid places • filters through moisture and forms a protective barrier between the water and the metal • eliminates moisture-triggered short circuits • suitable for electronic ignitions • protects vehicle locks from moisture and freezing • defrosts locks • removes dirt, dust, traces of coloured crayons and felt tip pens, chewing gum and adhesives • 1001 applications in industry, workshops or in the house.



spray 100 ml	spray 250 ml	duospray 250 ml	spray 500 ml	duospray 500 ml	5 l	25 l	200 l	package
24	36	36	24	24	1	1	-	cardbox (quantity)
4608	1764	1764	1008	1008	-	-	-	pallet (quantity)
001	058	786	787	793	789	790	791	barcode

**CX80 MAINTENANCE AND REPAIRS • TEFLON™**

An excellent multi-purpose product with exceptional quality of lubrication which can be used in many different industries and in the area of everyday life.

**PROPERTIES:** the result after using is a coat which improves the resistance to abrasion and increases the working life • the low-friction coefficient characteristic of TEFLON™, leading to high efficiency for electrical connections, structural fittings, military equipment, and in many other areas in which a repetitive movement of the surface is important • plays a major role in the bicycle industry, ideally suited for the lubrication of chains, gears, brake lines, gears, increases their working life and reduces friction between the elements and their wear and tear • also suitable as anti-adhesive agent • can be used in the process for formation of rubber and plastic components, it does not affect the stability and it makes it easier to release from the mould parts.

Teflon™ is a registered trademark of The Chemours Company FC, LLC. (DuPont), used under license by CX80.



spray 100 ml	spray 250 ml	duospray 250 ml	spray 500 ml	duospray 500 ml	5 l	package
24	36	36	24	24	1	cardbox (quantity)
4608	1764	1764	1008	1008	-	pallet (quantity)
211	187	188	792	788	794	barcode

### CX80 COPPER GREASE

**Anti-adhesive. Multi-purpose product for use under the most difficult conditions and within high temperature ranges from -30°C up to 1200°C.**

**PROPERTIES:** ensures excellent lubrication • safeguards against attrition, corrosion and high temperatures • wide temperature range (-30°C to +1200°C).

**APPLICATIONS:** screws and nuts • threads and all connected surfaces • fittings • spark plugs • wheel and brake discs • battery joints • port installations • revolving discs • highly stressed bearings of all kinds • elements in industrial, construction • other elements of industrial systems, construction, agricultural and motor vehicles.



tube 40 g	spray 150 ml	spray 500 ml	duospray 500 ml	cartridge 400 g	plastic jar 500 g	5 kg	17 kg	180 kg	package
50	20	12	12	18	6	1	1	1	cardbox (quantity)
6000	2400	1008	1008	1512	924	-	33	-	pallet (quantity)
663	010	065	664	48301	014	666	48279	667	barcode

### CX80 LITHIUM GREASE

**Multi-purpose product for the lubrication of industrial, agricultural and motor vehicles' systems. It ensures excellent lubrication even under the toughest conditions.**

**PROPERTIES:** resistant to water and oxidation • protects against attrition and corrosion • extends life of bearings • contains EP additives • mechanically stable and because of its soft consistency, easy to apply • passes the SKF EMCOR test • operating temperatures from -20°C up to +130°C.



tube 40 g	spray 150 ml	spray 500 ml	duospray 500 ml	cartridge 400 g	plastic jar 500 g	4,5 kg	17 kg	180 kg	package
50	20	12	12	18	6	1	1	1	cardbox (quantity)
6000	2400	1008	1008	1512	924	-	33	-	pallet (quantity)
668	013	064	669	670	671	672	48196	673	barcode

### CX80 MOLYBDENUM GREASE

**Easy to use grease. Multi-purpose product with EP additives molybdenum disulphide and friction modifiers for protection against wear, even under the toughest conditions.**

**PROPERTIES:** easy to handle pump mechanism • high temperature stability • resistance to moisture • operating temperature from -25°C up to +150°C.

**APPLICATIONS:** vehicles • forklifts • industrial equipment working in humid conditions (cranes, gantries, etc.) • lubricates joints, switches, bearings, shafts and other mechanisms.



tube 40 g	cartridge 400 g	plastic jar 500 g	5 kg	17 kg	180 kg	
50	18	6	1	1	-	package
6000	1512	924	-	33	-	cardbox (quantity)
678	679	680	681	48262	682	pallet (quantity)
						barcode

### CX80 CERACX GREASE

**Multi-purpose calcium grease for very difficult conditions, resistant to water.**

**PROPERTIES:** excellent thermal stability – regains its original texture after cooling to ambient temperature • exceptional resistance to water – consistency does not change even when large amount of water gets through the grease • does not contain lead or other heavy metals hazardous to health and the environment • brown color • application temperature from -35°C to +190°C • viscosity grade NLGI 2.

**APPLICATIONS:** all types of assemblies exposed to high pressures and shock loads, working in conditions where grease is in frequent contact with water (including sea water as it possesses anti-rust properties) • lubrication of the continuous casting lines • in steel mills • bearings in wet and dry places in paper mills (felt cylinders) • in difficult working conditions (humidity, load, high temperature, dust, etc.).



tube 40 g	plastic jar 500 g	5 kg	180 kg
50	6	1	1
6000	924	-	-
674	675	676	677

### CX80 CERACX LC GREASE

**Complex grease with EP properties, high temperature and water resistant.**

**PROPERTIES:** corrosion protection, long bearing service life, high load-carrying capacity and thermal resistance • excellent anti-oxidation and anti-corrosion properties also in the presence of seawater, due to the properties of calcium sulfonates • outstanding operating characteristics even in applications with high sliding velocities, where urea (polyurethane) or lithium complex greases are typically required • does not contain lead or other heavy metals, considered hazardous to human health and the environment.

**APPLICATIONS:** for all industrial applications involving moisture, loads, high temperatures, high pressures, dust, shock loads • for lubrication of all types of assemblies operating under conditions where grease is in frequent contact with water (even seawater) due to enhanced anti-rust properties) • for bearing lubrication in steel plants (continuous casting processes and rolling mills), in the paper industry, for the lubrication of hardwood granulating presses • the use of a pneumatic charging system is recommended.

plastic jar 500 g	
6	package
924	cardbox (quantity)
212	pallet (quantity)
	barcode

### CX80 GRAPHITE GREASE

**Anti-seize grease. Professional grease with mineral-based calcium with the addition of micronized graphite.**

**PROPERTIES:** high resistance to water • perfect corrosion protection • high resistance to pressure • protection against attrition • excellent adhesion at high temperatures, enables dry lubrication due to property of graphite • high electrical conductivity • graphite content: 15% • operating temperature from -30°C up to +600°C.

**APPLICATIONS:** general use (particularly under difficult conditions and high temperature) • open gearboxes • construction and agricultural machinery • chains in stoves (dry lubrication).



tube 40 g	cartridge 400 g	plastic jar 500 g	duospray 500 ml	5 kg	17 kg	180 kg	package
50	18	6	12	1	1	-	cardbox (quantity)
6000	1512	924	1008	-	33	-	pallet (quantity)
687	688	689	315	690	48195	691	barcode

### CX80 BEARING GREASE

**High-speed bearings lubrication. Complex lithium grease with selected mineral bases and additives (including EP).**

**PROPERTIES:** allows application at high temperatures of up to 220°C • excellent adhesion and water resistance • very high resistance to aging • the bearing speed factor of minimum DN 500.000.

**APPLICATIONS:** for the lubrication of bearings with high speed, temperature or humidity (mining, automotive and construction machinery, granulators, car vehicles) • bearings of fans and dryers • bearings of medium and high number of revolutions • bearings that are subjected to vibrations.



tube 40 g	cartridge 400 g	plastic jar 500 g	4,5 kg	180 kg	package
50	18	6	1	-	cardbox (quantity)
6000	1512	924	-	-	pallet (quantity)
692	693	694	695	696	barcode

### CX80 WATERPROOF GREASE

**Multifunctional EP grease provides high load carrying properties, resistance to fresh and salt water, and oxidation and corrosion protection.**

**PROPERTIES:** operating temperatures from -30°C up to +180°C • excellent water resistance – there are no changes in consistency when excessive water penetrates the grease • excellent anti-oxidation and anti-corrosion properties also in sea water because of addition of natural calcium sulfonate • does not contain lead or other heavy metals that are hazardous to human health or the environment.

**APPLICATIONS:** all greasing points on ship boards and for plain, roller and ball bearings, headsets, shock linkages, swingarm pivots and motorcycle • other uses in industry and transport • marine use • road construction, where a frequent contact with water occurs, for example, in chains, gears of excavators and cranes.



plastic jar 500 g	5 kg	180 kg
6	1	-
924	-	-
697	698	699

### CX80 MOTO CHAIN

**For chains and other motorcycle parts. Special formulation for motorcycles. Meets specific requirements for lubrication of chains and other moving parts of the motorcycle, such as high rotation and feed rate.**

**PROPERTIES:** resistant to dust and dirt • resistant to water and mud • transparent – leaves no spots on skin or clothing • it leaves a long lasting protective layer after drying, which enables a low-noise operation of the chain, and protects against corrosion • ideal for lubricating locks, exposed fork parts and wherever metal meets metal and friction should be reduced.



spray 150 ml	duospray 500 ml	5 l	package
24	12	1	cardbox (quantity)
2400	1008	-	pallet (quantity)
052	643	700	barcode

### CX80 WHITE GREASE

**Solid. Penetrates single gaps, forms a lubricating layer that exactly remains where the grease was applied.**

**PROPERTIES:** non-hardening • non-dripping • non-staining • does not cause discoloration on the paint • water and heat resistant • fights rust and corrosion • operating temperature from -40°C up to +100°C.

**APPLICATIONS:** long-lasting lubrication on auto hinges, gears, sprockets • outdoor hinges, latches, overhead door tracks, pulleys • locks • cables and guide rails.



spray 500 ml	4,5 kg	180 kg
12	1	1
1008	-	-
701	702	703

### CX80 ELECTRICX GREASE

**Synthetic oils based grease. Designed for lubrication of any type of machines operating at high temperatures, lightly loaded mechanically. Suitable for applications that require good electrical conductivity.**

**PROPERTIES:** outstanding resistance to oxidation, even in the presence of copper and its alloys • very good cohesion – the oil discharges from the lubricant in very small quantities, even at high temperatures • effective in sub-zero temperatures.

**APPLICATIONS:** protection against corrosion and oxidation of the terminals, connections points of weight and welding cables • lubricating stators • makes dismantling any electrical contacts easier • lubrication of the mechanical parts under voltage • lubrication of the windshield wipers.



tube 40 g	plastic jar 500 g	4,5 kg	170 kg	package
50	6	1	1	cardbox (quantity)
6000	924	-	-	pallet (quantity)
705	706	707	708	barcode



### CX80 SILICONE GREASE

**Silicone grease for plastic and rubber. Colorless lubricant with high viscosity.**

**PROPERTIES:** creates a protective film with excellent resistance • coverage of the friction surfaces with a thin layer of silicone grease leads to an effective reduction of friction and provides a long lasting protection of the equipment • suitable for use at contact surfaces of plastic, metal, ceramics, rubber, etc. • does not stain does not adhere to dust • non-adhesive – facilitates the removal of forms • operating temperature from -60°C up to +230°C.

**APPLICATIONS:** all kinds of sanitary equipment – conventional and lever (gas) valves, seals, connectors, fittings, valves, joints • clean lubrication of equipment in textile, paper, and food industry • electric and power distribution equipment (safety protection of electric circuits) • power cases which work under extreme temperatures (from -60°C up to +230°C) • lubrication of links, locks, hinges screws and sleeves in the automotive industry • protects against corrosion of printing machines, where the lubricant gets in contact with paper.

**Lubricants with incidental contact H1 153304.**



tube 40 g	cartridge 400 g	plastic jar 500 g	5 kg	17 kg	180 kg	
50	18	6	1	1	-	package
6000	1512	924	-	33	-	cardbox (quantity)
683	48300	684	685	48197	686	pallet (quantity)
						barcode

### CX80 ALUMINIUM GREASE

**An advanced, multi-purpose grease with aluminium dust content for connections exposed to very high temperatures.**

**PROPERTIES:** reduces friction and tear and wear of components • prevents squeaking • resistant to high pressure • protects against corrosion, fretting corrosion and oxidation • does not react with rubber • prevents seizure of pins • resistant to water and solutions of weak acids and bases • excellent vibration damping properties.

**APPLICATIONS:** lubrication of back side of brake pads, bolted connections (exhaust manifold bolts, glow plug threads, etc.) • prevents burning of solid gaskets • protection of nozzles in gas shielded metal arc welding • protection of lambda probes and injectors • heat exchangers, connectors in oil and gas burners • in applications where copper grease cannot be used, and the elements are exposed to high temperatures.



applicator 210 g with brush
12
1440
704

### CX80 GREASE FOR BRAKES

**For pistons, guide bars and brake cylinders.**

**PROPERTIES:** provides efficiency of brake bushes • compatible with brake fluids: DOT 3, DOT 4, DOT 5.1 • protects from corrosion • extends the lifetime of brake cylinders • from -60°C to +600°C.

**APPLICATION:** for lubricating cylinder holes and brake pistons.



tube 40 g	
50	package
6000	cardbox (quantity)
862	pallet (quantity)
	barcode

### CX80 GREASE FOR GATES

Lubricant for garage, sliding and rolling gates. Lubricates, preserves and protects against corrosion. Specially designed formulation for easy and effective maintenance.

**PROPERTIES:** lubricates all moving parts of gates and protects them from moisture and corrosion • maintains optimal operation in the winter in very low temperatures • prevents dirt and dust adhesion • removes squeaking and creaking • solves hard working mechanisms such as bolts and locks • unbolts frozen locks.

**APPLICATIONS:** hinges • fasteners • chain links • locks • hooks • springs • shock-absorbing parts • elements of engines.



spray 500 ml
12
1008
718

### CX80 TOWOCX GREASE

Multi purpose, lithium-calcium grease for use in all conditions, especially at high temperatures and where the use of conventional lithium greases is limited.

**PROPERTIES:** meets the requirements of most car manufacturers creates a durable layer resistant to moisture, temperature and pollution • mixable with most conventional lubricants • does not contain lead or other heavy metals hazardous to health and the environment • light brown color • application temperatures from -30°C to +160°C.

**APPLICATIONS:** lubrication of heavily loaded plain, roller and ball bearings, wheel bearings, constant velocity joints, elements of vehicle bodies (hinges, telescopic forks) and gear shock loaded gears • for general use in industry, where NLGI 2 EP grease is required, resistant to low and high temperatures .



plastic jar 500 g	5 kg	17 kg	180 kg	package
6	1	1	1	cardbox (quantity)
924	-	33	-	pallet (quantity)
715	716	48198	717	barcode

### CX80 KERAMICX CERAMIC GREASE

Ceramic grease for screws and connections exposed to high pressure and high temperature.

**PROPERTIES:** suitable for high temperature ranges of (up to 1400°C) • suitable for use in brake systems with ABS, ASR and ESP, exhaust mounting screws, head collectors and heads and other machine parts • anti-rust properties • protects against stainless steel clogging • water and acids-proof • does not contain heavy metals that are hazardous to human health or the environment.



tube 40 g	spray 500 ml	duospray 500 ml	applicator 210 g with brush	plastic jar 500 g	5 kg	180 kg	package
50	12	12	12	6	1	-	cardbox (quantity)
6000	1008	1008	1440	924	-	-	pallet (quantity)
709	889	710	711	712	713	714	barcode

### CX80 SILIKON SPRAY

For plastics and rubber. Colorless lubricant with high viscosity.

**PROPERTIES:** creates a protective film with excellent resistance • coverage of the friction surfaces with a thin layer of silicone grease leads to an effective reduction of friction and provides a long-lasting protection of the equipment • suitable for use at contact surfaces of plastic, metal, ceramics, rubber, etc. • does not stain does not adhere to dust • non-adhesive, facilitates the removal of forms • operating temperatures from -60°C up to +230°C.

**APPLICATIONS:** all kinds of sanitary equipment – conventional and lever valves (gas), seals, connectors, fittings, valves, joints • clean lubrication of equipment in textile, paper, and food industry • electric and power distribution equipment (assurance of electrical circuits) • energetic cases which work under extreme temperatures (from -60°C up to +230°C) • in the automotive industry for the lubrication of links, locks, hinges, screws and sleeves • protects against corrosion by printing machines, where the lubricant gets in contact with paper.

Lubricants with incidental contact H1 153304.



spray 300 ml	spray 500 ml	duospray 500 ml
12	12	12
1728	1008	1008
021	068	719


### CX80 DRY LUBRICANT • TEFLON™

Transparent lubricant, resistant to contamination, intended for dry lubrication of friction points.

**PROPERTIES:** prevents squealing, cracking sounds and jamming • ensures long-term protection against wear • does not attract dirt and dust • may be used in precision mechanics • lasting water, acids and alkalis resistance • resistance to temperatures from -180°C to +260°C (temperature) • it does not contain the mineral oil • it does not contain silicone.

**APPLICATIONS:** dry lubrication • in the case of a medium load it can be applied to metals, plastics, India rubber etc. • it is perfect for pushing roofs, armchair rails, hinges and door locks, sliding doors, suspended windows, window locks, hinges in furniture, drawers, guide rails, ball bearings, electrical switches etc. • may act as an anti-adhesive agent.

Teflon™ is a registered trademark of The Chemours Company FC, LLC. (DuPont), used under license by CX80.

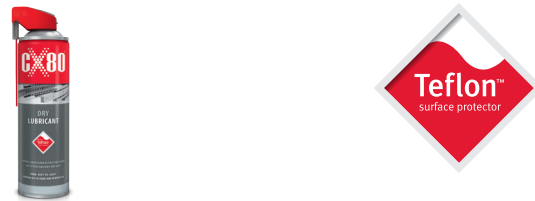

duospray 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
641	barcode

### CX80 GEAR AND STEEL WIRE ROPE LUBRICANT

Synthetic lubricant for moving parts of: wire ropes, slings, chain and gear wheels, chains, rims, slide rails and guides, rollers of conveyors operating at very high temperatures.

**PROPERTIES:** continuous lubrication of mechanisms and excellent protection of moving metal parts operating at high temperatures (up to 250°C) • exceptional cleanliness of lubricated parts • high degree of protection against corrosion.



duospray 500 ml
12
1008
721

### CX80 ACX FOOD GREASE

EP calcium grease for use in the food industry (NSF H1).

**PROPERTIES:** useful for working in humid conditions • perfect adhesion to metals.

**APPLICATIONS:** for lubricating all types of surface • loaded and unloaded mechanical components and devices such as bearings, joints, reduction gears, guide bars, cam mechanisms, sealings, gears.



duospray 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
48280	barcode

### CX80 GREASE FOR COFFEE MACHINES

**Food grease for use in all kinds of coffee machines. Regular use of the grease ensures optimal and efficient operation of the device and extends its service life.**

**PROPERTIES:** colourless grease with high viscosity • creates a layer exceptionally resistant to high and low temperatures, and water • thin layer of grease ensures maximum reduction of friction and long service life of the devices it protects • does not stain or bond with dust safe – does not contain any harmful solvents.

**APPLICATIONS:** ideal for use at the interface of surfaces made of plastic, metal, or rubber • for incidental contact with food and drinking water.

**NSF H1 certified product approved for use in the food industry!**



tube 40 g
50
6000
48267

### CX80 PENETRATING GREASE

**Resistant to high pressures.**

**PROPERTIES:** highly polymerized • provides great penetration • good adhesion to lubricated surface • resistant to high pressures • corrosion protection • resistant to water, salt water, alkalis and acids • does not contain resins and silicones.

**APPLICATIONS:** for lubricating parts exposed to high loads, strikes and vibration, like bolts • gears and sprockets • steel ropes • slide rails.



spray 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
720	barcode

### CX80 CHAIN LUBE

**Synthetic grease, highly recommended for lubricating moving components operating in very high temperatures.**

**PROPERTIES:** continuous lubrication of mechanisms at temperatures up to 260°C • excellent protection of moving metal components operating at high temperatures • additional anti-wear properties at high temperatures • exceptional cleanness of the lubricated systems and components • very good cleaning properties at high temperatures • very good anti-corrosion properties • protects metal components.

**APPLICATIONS:** roller (Gall) chains • conveyor and cam rollers • chains.



duospray 500 ml
12
1008
48183

### CX80 LOCK LUBE

**For cleaning, lubricating and unblocking all types of locks**

**PROPERTIES:** protects lock mechanisms • prevents jamming • anti-rust • protects against freezing • safe for rubber, painted or wooden materials.

**Teflon® is a registered trademark of The Chemours Company FC, LLC. (DuPont), used under license by CX80.**



spray 150 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
48347	barcode

## CX80 SILIKON PROFESSIONAL

Oil resistant sealant, capable of withstanding very long exposure to high and low temperatures, from -65°C to +260°C, intermittently up to +380°C. Elastic, fast curing product that forms in the reaction with atmospheric moisture. UV-resistant, not shrinking filling compound. Compresses and glues most surfaces such as glass, ceramics, aluminum and metal perfectly.

**APPLICATIONS:** machines and heating equipment • fireplaces • engines and other mechanical parts that are exposed to high temperatures • fireplaces, stacks and vents.

**TECHNICAL DATA:** heat resistance: -65°C to +380°C • curing time: about 3 mm/24 h • processing time 10-20 min • adjustment to movement of ±20% • temperature range: +5°C to +40°C • networking system: acetate (acetox).



syringe 80 ml	syringe 80 ml in blister	syringe 80 ml	tube 80 ml	tube 80 ml	applicator 210 g	applicator 210 g	package
20	20	20	50	50	50	50	cardbox (quantity)
1584	1584	1584	5500	5500	5500	5500	pallet (quantity)
323	611	324	623	623	623	623	barcode
red	red	black	red	black	red	black	



cartouche 310 ml	cartouche 310 ml	cartouche 310 ml	600 ml	package
24	24	24	12	cardbox (quantity)
2016	2016	1728	1200	pallet (quantity)
797	798	297	877	barcode
red	black	transparent	black	

## CX80 PROFESSIONAL ECO SILICONE

**Sealant. One-component, flexible (enhances load bearing & shock absorbing characteristics of the bond area), sticky paste in gray with very good adhesion to rough surfaces.**

**PROPERTIES:** does not contain toxic solvents • non-corrosive • oils, gasoline, greases resistant.

**APPLICATIONS:** general use • automotive industry (crankcases, timing covers, cylinder heads, oil pans, gear boxes, water pumps, thermostats) • can be used instead of permanent seals.

**TECHNICAL DATA:** • curing time: 3 mm/24 h • tooling time: 10-20 min • operating temperature from -60°C up to +380°C • applying temperature from +5°C up to +40°C • crosslinking: neutral.



syringe 80 ml	syringe 80 ml in blister	applicator 210 g	applicator 210 g	cartouche 310 ml	600 ml	package
20	20	12	12	24	12	cardbox (quantity)
1584	1584	1440	1440	2016	1200	pallet (quantity)
578	577	800	836	799	878	barcode
gray	gray	gray	black	gray	gray	

## CX80 FIRESTOP SEALANT

**Elastic, fireproof silicone-based leak stopper ensuring a maximum formability of linear dilatation in elements of fire separation.**

**PROPERTIES:** high compensation of dilatations formability • gas, smoke and water resistance (indoor use) • excellent weathering resistance (ozone and UV resistance) • considerable dilatation width (maximum up to 120 mm) • thermal resistance from -40°C do +180°C • it does not contain isocyanates and other harmful solvents.

**APPLICATIONS:** expansion dilatations in ceilings (inside and outside) joints between steel beams and walls (frame construction) • joints having highest requirements to meet.



cartouche 310 ml	package
24	cardbox (quantity)
2016	pallet (quantity)
801	barcode
gray	

### CX80 MULTI-PURPOSE SILICONE

For filling, gluing, pointing and grouting of ceramic and glass elements and certain metals.

**PROPERTIES:** excellent adhesion to porous – concrete, stone, masonry, brick, wood and non-porous substrates – glass, ceramics and glazed surfaces • durable, flexible, waterproof seal • skin formation time – approx. 5 min • the rate of curing – 3 mm/18 h.

**APPLICATION:** perfect for workshops and building works • grouting tiles both indoors and outdoors • ventilation systems • refrigerating systems.



cartouche 310 ml	cartouche 310 ml
24	24
1728	1728
172	171
white	transparent

### CX80 NEUTRAL SILICONE

NEUTRAL SILICONE with neutral hardening. For sealing and seaming of most materials including plastics and metals.

**PROPERTIES:** long-term resistance to all atmospheric influence • excellent adhesiveness to both porous surfaces: concrete, wall, brick, wood (also painted with acrylic paints); and non-porous surfaces: glass, ceramics, and other glaze surfaces, metals (including aluminium) and many plastics such as: PCV, acrylic and polycarbonate • does not cause metal corrosion • does not discolour porous surfaces • permanent elasticity after hardening • time of outer-shell formulation – circa 35 minutes • hardening time – 2 mm/24 h.



cartouche 310 ml	cartouche 310 ml	cartouche 310 ml	package
24	24	24	cardbox (quantity)
1728	1728	1728	pallet (quantity)
166	165	844	barcode
white	transparent	black	

### CX80 SILICX SUPER RTV GLUE FOR SILICONE

Colorless, elastic, self-leveling glue. Sealant of very good mechanical properties. Absorbs shocks and vibrations.

**PROPERTIES:** universal sealant and adhesive for general industry and electronics for FIPG applications. Does not require priming. Peel forming time – 10 minutes.

**APPLICATION:** For bonding/ sealing many materials – silicones, glass, ceramics, metals, plastic and powder coatings, as well as gaps filling.



tube 80 ml	applicator 210 g	cartouche 300 ml
50	12	24
4200	1440	1728
48099	48098	48096
transparent	transparent	transparent

### CX80 FOOD GRADE SEALANT

Silicone sealant for sealing joints in applications in contact with food and drinking water.

**PROPERTIES:** NSF certificate • aging resistant • not corrosive to metals • odorless • neutral curing.



cartouche 310 ml	package
24	cardbox (quantity)
1728	pallet (quantity)
48302	barcode
black	

### **CX80 FIREPLACE SEALANT**

**Based on water glass, designed for repairs in places exposed to extremely high temperatures (fireplaces, stoves, grates).**

**PROPERTIES:** operating temperatures up to +1250°C (stays up to +1500°C for a short time) • water glass based – increases gas-tightness • easy application • does not shrink or expand • resistant to weather changes, UV and aging effects • excellent adhesion to metal brick and cement.

**APPLICATIONS:** applying ceramic tiles to the fireplace surround or heat shielding behind the stove • fireplaces, ovens, grills • elements exposed to fire.



cartouche 300 ml
24
2304
802
black

package  
cardbox (quantity)  
pallet (quantity)  
barcode

### **CX80 PRIMER 77**

**One-component primer for use with cyanoacrylate, anaerobic, hybrid adhesives, and epoxy resins. It works by increasing the surface energy of the substrate on which it is applied.**

**APPLICATIONS:** bonding non-polar plastics that are difficult to bond, such as polypropylene, polyethylene, silicone rubber and even Teflon™.



spray 150 ml
20
2400
60850

### **CX80 ACTIVATOR 11**

**Activator for instant adhesives. Accelerates the curing of cyanoacrylate adhesives.**

**APPLICATION:** immediate curing of cyanoacrylate adhesives of the **CX80 BONDICX** series • particularly suitable for use on porous substrates where the adhesive must cure before being absorbed into the substrate.



spray 150 ml	package
20	cardbox (quantity)
2400	pallet (quantity)
60364	barcode



### CX80 BONDICX 01

Instant one-part, room-temperature curing cyanoacrylate adhesive with low viscosity and high strength.

APPLICATIONS: rubber • polystyrene • wood • metal • plastics • around-the-home use.



bottle 20 g	bottle 50 g
10	10
–	–
639	722

### CX80 BONDICX 05

General purpose cyanoacrylate adhesive in non-clogging bottle.

APPLICATIONS: porcelain • metal • wood • ceramics • rubber • leather • textile.



bottle 5 g	package
24	cardbox (quantity)
1680	pallet (quantity)
601	barcode

### CX80 BONDICX 06

One-component, fast curing cyanoacrylate adhesive with low viscosity for plastic and rubber.

APPLICATIONS: rubber parts (EPDM, NBR) • polyethylene • polypropylene • PTFE (Teflon) • fluorine rubber (silicone).



bottle 20 g	bottle 50 g
10	10
–	–
638	723

### CX80 BONDICX 16

High viscosity, ethyl-based instant adhesive. Clear.

APPLICATIONS: bonding metals, rubber and plastics such as ABS, PVC. The setting time of the adhesive is from 5 to 50 seconds.



bottle 20 g	package
10	cardbox (quantity)
–	pallet (quantity)
875	barcode

### CX80 BONDICX 20

Ethyl-cyanoacrylate adhesive with low viscosity for small plastic and rubber areas.

**APPLICATIONS:** where penetration of the adhesive is required (nitrile rubber, neoprene, polycarbonates, phenolic materials, steel, aluminum, zinc dichromate).



bottle 20 g	
10	
-	
727	

### CX80 BONDICX 22

High viscosity, ethyl-based instant adhesive. Clear.

**APPLICATIONS:** bonding metals, elastomers and plastics. May be used for polyolefins with the **CX80 PRIMER77** primer. The setting time of the adhesive is from 20 to 40 seconds.



bottle 20 g		package
10		cardbox (quantity)
-		pallet (quantity)
847		barcode

### CX80 BONDICX GEL

General purpose cyanoacrylate adhesive gel with high viscosity and high strength.

**PROPERTIES:** fast curing • non-dripping • perfect for porous materials or when controlling adhesive flow is critical.

**APPLICATIONS:** metal • plastic • leather • paper • cardboard • wood • cork • foam.



tube 3 g	tube 20 g
24	20
1680	-
804	805

### CX80 BONDICX 48

One-component cyanoacrylate adhesive with medium viscosity and high elasticity.

**APPLICATIONS:** wide range of metal, plastics and elastomers • ideal for bonding rubber to metal, stainless steel and galvanized sheet • mounting small, plastic gears on metal shafts • bonding rubber O-rings to the metal parts • installation of rubber seals.



bottle 20 g	bottle 50 g	package
10	10	cardbox (quantity)
-	-	pallet (quantity)
732	733	barcode

### CX80 BONDICX 60

General purpose cyanoacrylate adhesive perfect for bonding rubber to plastic, plastic to plastic and rubber to rubber.

**APPLICATIONS:** fast curing of any bonding elements • high strength.



bottle 5 g	
24	
1680	
616	

### CX80 BONDICX 96

Cyanoacrylate adhesive with low viscosity for repairing small, metal areas.

**APPLICATIONS:** where penetration of the adhesive is required (steel, aluminum, zinc dichromate, nitrile rubber, neoprene, polycarbonates, phenolic and ABS materials).



bottle 20 g		package
10		cardbox (quantity)
–		pallet (quantity)
725		barcode

### CX80 RC 03

Anaerobic adhesive for cylindrical joints. It cures when there is a closed air gap between closely adhering metal surfaces.

**PROPERTIES:** anaerobic • prevents corrosion of assembled parts.

**APPLICATIONS:** bonding of cylindrical parts to obtain high strength bonds.

bottle 250 ml	
10	
–	
310	

### CX80 RC 20G

Anaerobic adhesive for mounting cylindrical parts ensuring high strength. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** resistance to high temperatures • high durability, even in the case of loose or worn parts that require more fill slots • protection against corrosion • resistance to vibration • improves the uniform distribution of stress • initial binding to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +230°C.

**APPLICATIONS:** permanent bonding and protection of cylindrical fitting parts, where high temperature resistance is required.



bottle 10 ml	bottle 50 ml	bottle 250 ml	package
10	10	10	cardbox (quantity)
–	–	–	pallet (quantity)
597	598	734	barcode
green	green	green	

### CX80 RC 21

**Adhesive for stainless steel. For fixing cylindrical joints and securing threaded connections, highly durable. Binds in contact with metal surfaces, with no access of air.**

**PROPERTIES:** high durability • resistance to vibrations • preventing leakage of thread • increasing the force and slip for easy installation • hardening on passive metal surfaces, galvanised steel and stainless steel • high chemical resistance • initial binding to 30 minutes • full strength after 24 hours • resistant to temperatures from -55°C to +200°C.

**APPLICATION:** locking bolts and nuts • sealing • assembly of bearings, wheels, sprockets, pulleys, chain wheels, and flywheels • protection of threads against loosening during operation.



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml
10	10	10	10
-	-	-	-
48103	48194	48104	118
green	green	green	green

### CX80 RC 22

**Anaerobic adhesive for securing metal threaded connections with low strength bonding. Binding in contact with metal surfaces in the absence of air.**

**PROPERTIES:** low strength • initial binding up to 15 minutes • full strength: steel – after 6 hours, stainless steel – after 24 hours, brass – after 1 hour • temperature resistance from -55°C to +150°C.

**APPLICATIONS:** sealing and protection against self-loosening bolts with low resistance, threading, screws, adjustment screws, bolts fastening flanges, pulleys which could break during disassembly, eg. aluminum or copper.



bottle 10 ml	bottle 50 ml	bottle 250 ml	package
10	10	10	cardbox (quantity)
-	-	-	pallet (quantity)
651	653	735	barcode
purple	purple	purple	

### CX80 RC 38

**Anaerobic adhesive for mounting cylindrical parts providing high strength. Remains liquid until isolated from oxygen in the presence of metal ions.**

**PROPERTIES:** resistance to high temperatures • high strength • protection against corrosion • resistance to vibration • improves the uniform distribution of stress • initial binding to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +150°C.

**APPLICATIONS:** permanent binding and protection of rotating components • assembly of steel bearings, wheels, gears, pulleys, sprockets.



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml
10	10	10	10
-	-	-	-
585	183	586	736
green	green	green	green

### CX80 RC 41

**Anaerobic adhesive for fastening cylindrical parts with medium binding strength. It binds when in contact with metal surfaces and in isolation from oxygen.**

**PROPERTIES:** very high binding strength • medium level of disassembly characteristics • protection against corrosion • resistance to vibration • secured against self-unscrewing • initial binding of up to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +150°C.

**APPLICATIONS:** fastening cylindrical and concentric joints • fastening of bearings on shafts and castings • particularly recommended in cases of later disassembly for maintenance purposes.



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml	package
10	10	10	10	cardbox (quantity)
-	-	-	-	pallet (quantity)
656	655	657	739	barcode

### CX80 RC 42

Anaerobic adhesive for securing metal threaded connections with medium strength binding. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** medium strength • protection against corrosion • resistance to vibration • preventing leakage of thread • increasing the force and slip for easy installation • initial binding to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +150°C • disassembly with manual tools.

**APPLICATIONS:** locking nuts and bolts • sealing • protects threads against loosening during vibration • recommended for small thread (the thread diameter up to M25).



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml
10	10	10	10
-	-	-	-
587	588	589	740
blue	blue	blue	blue

### CX80 RC 43

Anaerobic adhesive for securing metal threaded connections with medium strength bonding. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** medium strength • protection against corrosion • resistance to vibration • preventing leakage of thread • increasing the force and slip for easy installation • initial binding to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +150°C • disassembly with manual tools.

**APPLICATIONS:** locking nuts and bolts sealing • protects threads against loosening during vibration • recommended for small thread (the thread diameter up to M36).



bottle 10 ml	bottle 10 ml w blistrze	bottle 50 ml	bottle 250 ml	package
10	10	10	10	cardbox (quantity)
-	-	-	-	pallet (quantity)
590	591	592	658	barcode
blue	blue	blue	blue	

### CX80 RC 48

A single component, high strength anaerobic adhesive. It quickly develops high strength and withstands higher operating temperatures than standard products.

**PROPERTIES:** increases strength of press-fit assemblies.

**APPLICATIONS:** assembly of bearings, rings, gears and rotors on shafts.

bottle 50 ml
10
-
631

### CX80 RC 65

Anaerobic sealant for pipe threads with low strength. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** low strength for easy disassembly • protection against corrosion • resistance to vibration • preventing leakage of thread • increasing the force and slip for easy installation • initial binding to 2 hours • full strength after 24 hours • seal until the burst pressure (10 000 psi) • instant (after 20 minutes) pre-seal (up to 2 bar) • resistant to temperatures from -55°C to +150°.

**APPLICATIONS:** locking and sealing pipe threads with a diameter of 15 to 80 mm • protects threads against loosening during vibration • recommended for metal threads.



tube 50 ml	package
10	cardbox (quantity)
-	pallet (quantity)
650	barcode

### CX80 RC 69

Anaerobic sealant for metal threads with medium strength. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** medium strength • protection against corrosion • initial binding to 2 hours • full strength after 24 hours • seal until the burst pressure (10 000 psi) • instant (after 20 minutes) pre-seal (up to 2 bar) • resistant to temperature from -55°C to +150°C.

**APPLICATIONS:** blocking and sealing pipe threads • protects threads against loosening during vibration.



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml
10	10	10	10
–	–	–	–
659	660	649	741

### CX80 RC 70

Anaerobic adhesive for securing metal threaded joints with very high bonding strength. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** high strength • protection against corrosion • resistance to vibration • increasing pressure and slip for easy installation • resistance to oiling • initial binding to 15 minutes • full strength after 24 hours • resistant to temperatures from -55°C to +150°C.

**APPLICATIONS:** permanent locking of nuts and bolts • sealing • securing threads against loosening during vibration • recommended for small thread (the thread diameter up to M20).



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml	package
10	10	10	10	cardbox (quantity)
–	–	–	–	pallet (quantity)
593	594	595	648	barcode
green	green	green	green	

### CX80 RC 72

Anaerobic adhesive for securing metal thread joints with very high binding strength. It binds when in contact with metal surfaces and in isolation from oxygen.

**PROPERTIES:** high binding strength • protection against corrosion • resistance to vibration • safeguarding against thread leakages • resistance to high temperatures • initial binding to 15 minutes • full strength after 24 hours • temperature resistance from -55°C to +230°C.

**APPLICATIONS:** permanent blocking of nuts and bolts • sealing • securing threads against self-unscrewing during vibrations • recommended particularly for small-size threads (thread diameter of up to M80).



bottle 10 ml	bottle 10 ml in a blister	bottle 50 ml	bottle 250 ml
10	10	10	10
–	–	–	–
662	661	647	742

### CX80 RC 74

Anaerobic sealant for flat surfaces with medium strength. Remains liquid until isolated from oxygen in the presence of metal ions.

**PROPERTIES:** medium strength • resistance to oil, water and glycol • protection against corrosion • initial binding to 20 minutes • full strength after 24 hours • seal until the burst pressure (10 000 psi) • instant (after 20 minutes) pre-seal (up to 0.5 bar) • resistant to temperature from -55°C to +150°C.

**APPLICATIONS:** sealing of tightly fitting metal surfaces.



tube 50 ml	package
10	cardbox (quantity)
–	pallet (quantity)
646	barcode

## ANAEROBIC ADHESIVES HYBRID ADHESIVES



### CX80 RC 77

**Anaerobic sealant for pipes from 3/4" to 3" with low strength. Remains liquid until isolated from oxygen in the presence of metal ions.**

**PROPERTIES:** low strength • resistant to oil, water, fuel, hydraulic fluids • shear strength on steel : 11 N/mm<sup>2</sup> • initial binding: steel – after 25 minutes, stainless steel – 4.5 hours, brass – 15 minutes • full strength: steel – after 6 hours, stainless steel – after 36 hours, brass – after 1 hour • temperature resistance from -55°C to +150°C.

**APPLICATIONS:** protection against leakage of liquids and gases in metal installations.



tube 50 ml	bottle 250 ml
10	10
–	–
645	743

package  
cardbox (quantity)  
pallet (quantity)  
barcode

### CX80 HYBRICX PREMIUM

**General purpose adhesive with a high modulus of viscosity and high penetration capacity. One-component adhesive does not react with the surface, curing at room temperature, used for the installation of a high strength joint.**

**PROPERTIES:** ready to use • hybrid technology (combines the best properties of silicone sealants and polyurethane adhesives) • cures in contact with moisture • high strength bonding • consistency prevents adhesive flow • completely odorless and solvent-free • perfect for smooth and porous surfaces • excellent adhesion without primer • can be painted and sandblasted.

**APPLICATIONS:** bonds almost all areas – ceramics, wood, metals, plastics, concrete etc. • elements exposed to difficult operating conditions (eg. sealing natural stone) • fastening elements exposed to vibrations and high speed.



applicator 210 g	applicator 210 g	applicator 210 g	cartouche 290 ml	cartouche 290 ml	600 ml	600 ml	package
12	12	12	24	24	12	12	cardbox (quantity)
1440	1440	1440	2016	1728	1200	1200	pallet (quantity)
744	279	837	745	350	876	002	barcode
white	black	gray	white	black	white	black	

### CX80 HYBRICX 35 C

**Fast-curing and high strength adhesive. Combines, adhesives and seals all possible surfaces.**

**PROPERTIES:** cures at room temperature in contact with moisture • creates solid, flexible joint • solvent-free • does not contain phthalates and tin compounds • odorless • easy to process at temperatures from +5°C to +40°C • stable at temperatures from -40°C to +100°C • crystal clear • resistant to yellowing • corrosion-resistant • high strength bonding on a variety of substrates.

**APPLICATIONS:** perfect for invisible bonding where bond strength of a structural adhesive and curing speed of an instant adhesive is needed • bonding various materials, such as: glass, plexiglass, wood, metals, transparent decorations, plastic or natural stone.



applicator 210 g	cartouche 290 ml
12	24
1440	2016
746	747
transparent	transparent

### CX80 HYBRICX 45 S

**Fast-curing and high strength adhesive. Combines, adhesives and seals all possible surfaces.**

**PROPERTIES:** cures at ambient temperature in contact with moisture creating a solid, flexible joint • universal • suitable for bonding a wide variety of surfaces • solvent-free • does not contain isocyanates and phthalates • odorless • easy to process at temperatures of +5°C to +40°C • stable at temperatures from -40°C to +100°C • corrosion-resistant • creates a flexible joint after curing • can be painted.

**APPLICATIONS:** perfect for bonding where instant curing of an adhesive is needed • bonding various materials, such as: wood, glass, metals, plastics and mineral surfaces • perfect for mirror installation.



applicator 210 g	package
12	cardbox (quantity)
1440	pallet (quantity)
748	barcode

### CX80 HYBRICX 70 S

**Fast-curing and high strength adhesive. Combines, adhesives and seals all possible surfaces.**

**PROPERTIES:** cures at room temperature in contact with moisture • creates solid, flexible joint • high strength bonding on a variety of substrates (wet and without any primer) • solvent-free • does not contain isocyanates, phthalates, tin and lead compounds • does not contain plasticizers • odorless • easy to process at temperatures of +5°C to +50°C • stable at temperatures from -40°C to +100°C • instant curing • water-resistant • corrosion-resistant • creates a flexible joint after curing • can be painted and polished • resistant to acids, alkalis, mineral oils and solvents • cure time: 3 minutes.

**APPLICATIONS:** connects, secures, seals and fills many materials, such as wood, glass, metals, plastics and mineral substrates • glues frames, decorative moldings, cables, panels (siding) • useful for every handyman.



applicator 210 g	package
12	cardbox (quantity)
1440	pallet (quantity)
749	barcode



### CX80 ECO BONDICX. CONSTRUCTION ECO-ADHESIVE.

**Construction Eco-Adhesive. Professional adhesive designed for repairing or bonding car body elements of passenger cars, trucks and specialist body-works (ambulances, bank armoured vehicles, trailers for transporting animals, campers, buses, semi-trailers).**

**PROPERTIES:** easy to use • combines both smooth and porous surfaces • after hardening can be painted and sandblasted • excellent in terms of strength and safe use.

**APPLICATION:** bonding elements of the vehicle body skin • ideal for combining aluminium, steel, glass fibre, carbon fibre as well as composites • permanent bonding of heavy and heavily loaded elements, exposed to difficult operating conditions (e.g. can be used on natural stone – does not change colour of the structures) • bonding elements exposed to oscillations and vibrations.



cartouche 290 ml
24
1728
60872
white

### CX80 ECO BONDICX. ASSEMBLY ECO-ADHESIVE.

**Professional fast-curing adhesive, designed for all types of materials and surfaces, for use in all conditions. For inside and outside elements of absorbent and non-absorbent materials.**

**APPLICATION:** fixing heavy, hard finishing and decorative elements made of metals, wood, natural stone, polystyrene, polyurethane and other synthetic materials, etc. • for most construction substrates, e.g. for bricks, concrete, plaster, drywalls, wood and wood-like panels • for assembly of ventilation duct elements • for cable trays • perfect adhesive for floor panels and skirtings • suitable for assembling or sealing advertising elements inside and outside.



cartouche 300 ml	package
24	cardbox (quantity)
1728	pallet (quantity)
60845	barcode
white	

### CX80 ECO BONDICX. WOOD ECO-ADHESIVE.

**Professional wood adhesive, for outdoor and indoor use.**

**PROPERTIES:** ideal for bonding wood - slats, panels, cornices, etc., as well as plaster and difficult-to-bond hard plastics • fills deficiencies in the substrate • waterproof • high adhesive strength • can be painted • solvent-free – eco-friendly • applicator easy to use and clean.

**APPLICATION:** assembly of wall and skirting boards, panels, cornices, decorative boards, decorative profiles, wooden slats, door plates, etc. • replaces screws, nails, pegs or other adhesives • for absorbent materials • for outdoor and indoor use.



cartouche 300 ml
24
1728
60846
white

### CX80 ECO BONDICX. ECO-FRIENDLY ACRYLIC SEALANT.

**Material for filling gaps and cracks in plasters, masonry, wood and for joints between door frames and plaster or siding elements.**

**PROPERTIES:** for indoor and outdoor use • from -25°C to + 80°C • flexible • highly adhesive • waterproof.

**APPLICATION:** for filling joints, cracks and defects in walls, plasters and wood • for all compact, porous and absorbent materials (aerated concrete, gypsum, sandstone, particle and plaster/gypsum boards) • for paint coatings, ceramic tiles and polystyrene • for filling joints between door frames and thermal insulation panels when insulating buildings with the light-wet method.



cartouche 300 ml	package
24	cardbox (quantity)
1728	pallet (quantity)
909	barcode
white	

### CX80 XBRAKE CLEANER

Instant spray for cleaning brakes.

**PROPERTIES:** removes all sediments from asphalt and tar, dust from brake pads wear and baked-on dirt • eliminates brakes squeal • leaves no traces • removes brake fluid, oil and grease • makes rapid repair and fitting of parts easier • does not contain chlorinated solvents • degreases.

**APPLICATIONS:** cleaning working parts of the braking system • can be used for cleaning carburetors and throttle (won't get into the engine or the injection system).



spray 500 ml	5 l	25 l	200 l
12	1	1	-
1008	-	-	-
384	750	751	752

### CX80 CARBU & EGR CLEANER

Agent for fast and efficient cleaning of carburetors, throttles, injectors, EGR valves and entire fuel systems in gasoline engines (combustion chamber, fuel tank, nozzles, valves, spark plugs).

**PROPERTIES:** removes all dirt, such as carbon deposits, limes, dust, pitch and other • safe for lambda probes and catalysts • for four- and two-stroke engines • provides anti-corrosive protection • reduces combustion • increases power • reduces exhaust emissions.



spray 500 ml	5 l	25 l	package
12	1	1	cardbox (quantity)
1008	-	-	pallet (quantity)
858	249	242	barcode

### CX80 ENGINE CLEANER

Car engine cleaner.

**PROPERTIES:** contains additives that easily dissolve burnt oil, car grease, stains of petrol and any dried dirt • safe for electronics, ECU (computer) and electrical wiring • does not contain dissociated ions • low electrical conductivity • does not leave salty layer.

**APPLICATIONS:** exterior cleaning of car engines • specially designed for modern TDI engines, TDCi, CDTi, JTDm.



atomizer 600 ml	5 l	25 l	200
12	1	1	1
660	-	-	-
753	754	755	756

### CX80 ENGINE CLEANER STRONG

Strong preparation for cleaning vehicle engines in a concentrated formula.

**PROPERTIES:** contains additives, which easily dissolve even the most difficult dirt • safe for electronics, ECU (computer) and electrical wires • does not contain dissociated ions • features low conductivity • does not form salts after drying.

**APPLICATIONS:** removal of particularly tough dirt from vehicle engines.

5 l	25 l	package
1	1	cardbox (quantity)
-	-	pallet (quantity)
809	331	barcode

### CX80 INOX CLEANER

Spray for cleaning and maintenance of stainless steel.

**PROPERTIES:** cleans and protects stainless steel, both matt and polished • removes dust, dirt, adhesive tape and marker residues, greasy fingerprints, lubricating layers • does not leave streaks • gives the surface an even, shiny look • contains care and protection oil • leaves protective film that prevents dirt adhesion • water-resistant • antistatic • economical to use • biodegradable - does not contain phosphates, silicone, AOX compounds • suitable for cleaning aluminium alloys (test in an invisible place before use).



spray 500 ml
24
1008
830

### CX80 ACTIVE FOAM TRUCK CONCENTRATE

Agent in the form of foam intended for washing vehicles.

**PROPERTIES:** perfectly removes road dirt that occurs during vehicle operation • preparation intended for work with foaming devices, as well as manual washing • can be used for all types of motor vehicles.

5 l	25 l	package
1	1	cardbox (quantity)
-	-	pallet (quantity)
919	918	barcode

### CX80 ON RUST

Rapid, high-performance rust remover.

**PROPERTIES:** removes rust either in the free and bound scale protects against corrosion • penetrates into the gap, e.g. merging plates welded and crimped • fast, long-lasting and easy to maintain even heavily corroded parts.

**APPLICATIONS:** anti-corrosion protection of any metal conjunction • hard-metal connections, for example: thresholds, wheel chassis components removal and neutralization of corrosion.



dospray 500 ml
24
1008
580

### CX80 ON RUST MoS<sub>2</sub>

Instant, highly efficient rust remover.

**PROPERTIES:** removes rust both in the form of a free tarnish and bounded scale • protects against corrosion • displaces and bonds water and moisture • shows high capillary properties and penetrates crevices • creates a layer that prevents squeaks.

**APPLICATIONS:** protection against corrosion of hardly accessible joints of metal plates, e.g. thresholds, wheel arches • removal and neutralisation of corrosion products • quick, long-lasting and easy maintenance of even the most corroded elements.



dospray 500 ml	package
24	cardbox (quantity)
1008	pallet (quantity)
48264	barcode

### CX80 ON RUST ICE

**Rust remover with freezing effect.**

**PROPERTIES:** extreme cooling effect on corroded elements up to -39°C • penetration of micro-fissures and creation of a sliding surface making it easy to disassemble components.

**APPLICATIONS:** disassembly of injectors • unscrewing of heater plugs and other well-protected elements.



spray 500 ml
12
1008
579

### CX80 CONTACTX

**Cleaning and dissolving spray, for the electronics and electrical engineering.**

**PROPERTIES:** removes grease, dirt, old lubricants and oils, silicones, sulphides, oxides and any soldering residue.

**APPLICATIONS:** cleaning of printing plates directly after the installation of the elements • removal of scratching and creaking noises with potentiometers • cable and edge connection where the maximum reduction of resistance is required (installation of computers, high-end, welding).



duospray 500 ml	5 l	25 l	package
12	1	1	cardbox (quantity)
1008	-	-	pallet (quantity)
757	758	759	barcode

### CX80 CONTACTX IPA

**Isopropyl alcohol-based cleaning and washing spray for optical and mechanical parts, audio and video equipment and electronic components.**

**PROPERTIES:** the product is 99.7% pure isopropyl alcohol • inert for plastics: can be safely applied to any type of surface • additive-free, evaporates fully leaving no sediment • does not cause soiling • removes hardened lubricants, grease and waterproof inks from precision mechanics devices, lenses, mirrors • can be used for disinfecting electronic component surfaces.

**APPLICATION:** cleaning optical devices • cleaning optical-fibre, mirrors, polished metal surfaces • cleaning magnetic heads in audio and video equipment, disk drives and rubber rollers, printed circuit boards.



spray 500 ml
12
1008
48275

### CX80 CONTACTX PCC

**A cleaner that removes soldering residues.**

**PROPERTIES:** removes all types of flux without leaving any residues • dries quickly • does not damage printed circuit boards and their protective layer • ensures perfect cleanliness of printed circuit boards • prevents the formation of stray surface currents • ensures high insulation strength.

**APPLICATION:** removes all dirt: flux, rosin and other elements created during soldering of printed circuit boards that could cause corrosion, punctures and leakage of electricity.



applicator with a brush 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
48276	barcode

### CX80 NON-FLAMMABLE AIR DUSTER

The compressed gas to remove dust both from external and internal elements of electronic equipment.

**PROPERTIES:** perfectly removes any dust from office equipment • ideally clean very dusty places • the product can be used to remove dust both from external and internal elements of electronic equipment • ideal for removing particulates from heat sinks, computer fans, etc. • a long tube added to the packaging allows for spot cleaning and reaching hard-to-reach places.



spray 500 ml
24
1008
48108

### CX80 AIR DUSTER

Compressed air allows dust and other dirt to be removed quickly and effectively from hard-to-reach areas. The high pressure providing a powerful jet ensures thorough cleaning of detailed parts.

**PROPERTIES:** easy to use • leaves no residue • dry air blast • safe for plastics, rubber and painted surfaces.

**APPLICATION:** electronic devices • household appliances • cameras • computers • laboratory equipment • microscopes • office equipment • oscilloscopes.



spray 500 ml	package
24	cardbox (quantity)
1008	pallet (quantity)
48349	barcode

### CX80 CLEANER PROF

The preparation is recommended for cleaning and degreasing of surfaces before applying glue, doing repair work or assemblage of machinery components.

**PROPERTIES:** removes the majority of greases, oils, lubricating preparations and metal chippings • appropriate for use on metal, glass, rubber, the majority of plastics and painted surfaces • does not contain water • reduces the risk of corrosion.



spray 500 ml	5 l
24	1
1008	-
766	767

### CX80 LABEL REMOVER

Created specifically for removal of the adhesive on labels and traces of markers.

**APPLICATIONS:** to remove the adhesive remaining after breaking foil, tape, labels, vignettes, control stickers from car windows, etc. • to remove traces of markers from metal, glass, porcelain, plastic materials such as artificial leather and leather • for removal of paper stickers.



spray 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
642	barcode

### CX80 EKO CLEANER

A multifunctional, biodegradable agent for cleaning and degreasing purposes.

**PROPERTIES:** removes grease and oils (even lingering ones), coked residues, and all organic and inorganic impurities • 100% biodegradable and harmless • does not contain VOC and hydrocarbon solvents • odourless • may be used on sensitive materials.

**APPLICATIONS:** removal of tar, resins, gasoline, diesel, kerosene, heating oil • removal of anti-corrosive coatings • cleaning devices in the food industry • for cleaning vehicle bodies and engines • cleaning machine tools and machined parts • cleaning brushes and tools used for painting.



duospray 500 ml
24
1008
60916

### CX80 JOINTS AND WELDS

Cleaner for bathroom joints.

**PROPERTIES:** cleans • disinfects • removes black marks • bleaches.

**APPLICATIONS:** bathrooms, toilets, kitchens • trays, bathtubs, sinks, toilet bowls and toilet boards • walls and floors in damp rooms • ceramic, acrylic, rubber, silicone joints and welds • shower curtains • synthetic resin surfaces.



atomizer 600 ml	package
12	cardbox (quantity)
660	pallet (quantity)
760	barcode

### CX80 FIREPLACES AND GRILLS

Cleaner for fireplaces, ovens and grills.

**PROPERTIES:** thoroughly removes dirt, soot and black streaks • perfectly cleans burnt fat • can be applied to surfaces in contact with food.

**APPLICATIONS:** cleaning and degreasing grills, ovens, hobs (also ceramic) and accessories • cleaning windows, stone and bricks in fireplaces.



atomizer 600 ml
12
660
761

### CX80 CLEANER

Cleaning and degreasing concentrate.

**PROPERTIES:** cleans and degreases all surfaces • removes greases, oils and soot • non-toxic, non-flammable, bio-degradable • does not stain cleaned surfaces • for industry and household use.

**APPLICATIONS:** before laquering, painting, gluing • for cleaning electrical connectors • for removing car wax buildup.



atomizer 600 ml	5 l	25 l	200 l	package
12	1	1	1	cardbox (quantity)
660	-	-	-	pallet (quantity)
762	763	764	765	barcode

# ANTI-CHIPPING, WELDING PRODUCT EPOXY RESINS, SEALANTS



## CX80 EASY WELD

Anti-chipping, welding product.

**PROPERTIES:** reduces adhesion of metal fragments • improves welding efficiency • silicone-free.

**APPLICATIONS:** protects nozzles, tools and surfaces from fusing metal splinters by electric while welding (MIG/MAG).



spray 500 ml	5 l	25 l
12	1	1
1008	-	-
768	769	770

## CX80 GAS LEAK DETECTOR

Spray for leak detection in compressed air and gas systems, also very low pressure systems.

**PROPERTIES:** dense foam sticks to tested elements for a long time • effective from -35°C • can be used on metal and plastic surfaces • free of hazardous solvents, silicones and oils • environmentally safe.

**APPLICATION:** suitable for compressed air systems, gas systems, hoses, valves, piping, fittings, compressed air containers, air compressors, etc.



spray 500 ml	duospray 500 ml	package
12	12	cardbox (quantity)
1008	1008	pallet (quantity)
913	48281	barcode

## CX80 AUTO WELD. COLD WELDING.

Two-component epoxy resin to bind all hard surfaces.

**PROPERTIES:** creates a resistant joint • useful wherever you need to glue or fill surfaces • fixes all hard surfaces, such as metal, steel, iron, aluminium, brass, copper, zinc, wood, porcelain and plastic • glues and repairs damaged pipes, fuel tanks, batteries, cylinder heads, engine blocks • can be drilled, sanded, milled, threaded and painted • it can withstands temperatures up to 315°C • durability in tube – 25 years.



tubes 2x27 g
30
2100
772

## CX80 KWIK WELD. COLD WELDING.

Quick-drying two-component epoxy adhesive for all hard surfaces.

**PROPERTIES:** creates a resistant joint • can be shaped to 4 minutes after application • glues, fills, fixes all hard surfaces, such as: metals, steel, iron, aluminium, brass, copper, zinc, wood, porcelain and plastic • can be drilled, sanded, milled, threaded and painted • withstands temperatures up to 150°C • durability in tubes – 25 years.

**APPLICATIONS:** bonding and repairing of cracked engine blocks, jacks and valve guides, pulleys, alternators and starters, cut down drains, bridges and hubs, cracks and leaks, leaky boilers, refrigeration units, ovens parts, bathrooms equipment, tiles ceramic pipes for hot and cold water, screws, bolts and dowels, washing machines, dryers, lawnmowers etc.



tubes 2x27 g	package
30	cardbox (quantity)
2100	pallet (quantity)
773	barcode

### CX80 STIK WELD

Two-component epoxy sealant reinforced with steel.

**PROPERTIES:** joins, fixes, seals (also under water) • ideal for emergency and quick repairs • fixes all hard surfaces, such as metal, steel, iron, aluminium, brass, copper, zinc, wood, porcelain and plastic, batteries, fuel tanks, cylinders, cast gears and pumps, cylinder heads and many others • can be drilled, sanded, milled, threaded and painted (its consistency eliminates leakage) • stainless steel, unshrinkable, non-toxic • resistance to temperatures up to +150°C.



tube 60 g
18
1260
774

### CX80 SILV WELD

Two-component, transparent epoxy adhesive for general use.

**PROPERTIES:** easy application • fixes after mixing the two components • high strength • moisture resistant • due to the long time shelf life and medium viscosity adhesive is ideal for large surfaces and where long period of time is required to set the parts to be bonded • perfect for all types of metal, ceramics, wood, glass, rigid plastics and many others • withstands temperatures up to 150°C.



applicator 24 ml	package
24	cardbox (quantity)
2160	pallet (quantity)
582	barcode

### CX80 DACNICX

Mineral oil for air compressors.

**PROPERTIES:** protects against wear and corrosion • prevents the formation of deposits and carbon deposits • ensures good separation of oil-air and oil-condensate mixtures • optimizes the efficiency of compressors, which reduces the operating costs of obtaining compressed air • extends the service life of separation filter inserts • prevents filter clogging • withstands temperatures up to 100°C.

**APPLICATION:** lubrication of screw (rotary) and reciprocating air compressors.



bottle 600 ml
12
660
179

### CX80 PNEUMACX ANTIFREEZE

Synthetic oil for pneumatic tools.

**PROPERTIES:** prevents wear and extends the life of tools • resistant to impacts • contains high-quality EP additives • ensures operation of the equipment at low temperatures • protects against wear and corrosion • removes water • prevents ice formation at the air outlet • incompatible with typical mineral oils • low pour point • withstands temperatures up to -50°C.

**APPLICATION:** lubrication of pneumatic tools, high-performance impact drill • also suitable for spray lubricators in pneumatic systems.



bottle 600 ml	5 l	package
12	1	cardbox (quantity)
660	-	pallet (quantity)
177	338	barcode



## CX80 PNEUMACX M

Mineral oil for pneumatic tools.

**PROPERTIES:** prevents wear and extends the life of tools • resistant to impacts • contains high-quality EP additives • high oil viscosity reduces oil mist • protects against wear and corrosion • removes water • suitable for confined spaces (mine shafts, tunnels).

**APPLICATION:** lubrication of pneumatic tools, high-performance impact drills • also suitable for spray lubricators in pneumatic systems.



bottle 600 ml
12
660
178

## CX80 HEALTH OIL SIL 100

Special low-density oil for a very wide range of industrial applications.

**PROPERTIES:** forms a coating of exceptional resistance • coats friction surfaces with a thin film of silicone grease ensuring maximum friction reduction and long life of protected equipment • does not stain nor stick to dust • anti-adhesive • facilitates a removal from moulds • has strong hydrophobic properties • colourless and odourless • operates at temperatures from -60 to +230°C • contains no harmful solvents.

**APPLICATION:** for use on contact surfaces made of plastic, metal, ceramics, rubber and many others • for lubrication of cables in armours, locks, hinges, bushings and screws • for lubrication of headrest components in vehicles • clean lubrication in textile, paper and food industries • for electrical and power equipment (protection of current path).

5 l	package
1	cardbox (quantity)
-	pallet (quantity)
274	barcode

## CX80 STARTING FLUID

Makes starting petrol and diesel engines at low temperatures easier.

**PROPERTIES:** causes rapid engine start, extending life of the starter and the battery • contains an additive that lubricates upper part of the cylinder, in order to minimize • the consumption of the engine failed starts • effective up to -50°C • aerosol fits all standard brackets injectors.

**APPLICATIONS:** in passenger cars, trucks, buses, construction and agricultural machinery, boats, airplanes, mining equipment.



spray 500 ml
24
1008
775

## CX80 FAN BELT SPRAY

Applicable for all types of drive belts and suitable for its strengthening and securing it against slippages caused by heat, cold, humidity or presence of liquids.

**PROPERTIES:** easy to use • suitable for all types of belts • preserves its softness, does not harden • protects the belt against aging • hinders humidity and therefore safeguards against cracks and premature wear and tear • increases friction, securing the belt against slippage.

**APPLICATIONS:** for fan and flat belts, made of rubber, leather or fabric • particularly suitable for all types of conveyer belts in auto vehicles, lorries/trucks, busses and ship engines, agricultural equipment, in air-conditioning equipment and industry-used drive belts.



spray 500 ml	package
24	cardbox (quantity)
1008	pallet (quantity)
776	barcode

### CX80 MIRROR BOND

Adhesive for bonding and mounting reverse mirror to the windscreen.

**PROPERTIES:** rapid and durable bond • perfect for self-assembly.



applicator 2 g
24
1680
778

### CX80 WINDOW DEICER

Car windscreen defrosting preparation, effective in temperature as low as -50 °C.

**PROPERTIES:** immediate defrosting of a frozen windscreen, melting frost, snow and ice • quick vaporisation, without leaving smudges on the surface or a film of frost • safe for wiper blades.



atomizer 600 ml	5 l	package
12	1	cardbox (quantity)
660	-	pallet (quantity)
779	780	barcode

### CX80 PERM-O-SEAL

Powdered, metallic sealant for quick repair of leaks in radiators, engine blocks and heads.

**PROPERTIES:** provides durable and elastic joints • prevents scaling and rusting, considerably improving the flow of fluid • reduces water pump noise • seals flexible connections • resistant to high temperatures • can be used with standard coolants and water • effectiveness of the product does not depend on the capacity of cooling system, but on the size of the leak • after sealing it creates a durable, resistant joint.

**APPLICATIONS:** Penetrates the cooling system until it detects the leak, then by contact with air it creates a durable, waterproof joint outside the hole or gap.



applicator 21 g
18
1512
023

package
cardbox (quantity)
pallet (quantity)
barcode

## PROTECTIVE COATINGS

### CX80 CYNK SPRAY

**Quick-drying spray providing protection against corrosion.**

**PROPERTIES:** electrically conductive, allowing electric welding of coated surface • excellent adhesion • creates a smooth, protective coating for all types of paint • perfect as a primer for surfaces exposed to moisture • resistant to high temperatures (may be used from 15°C to 30°C; however, the most effective protection against corrosion occurs at the temperature above 20°C – the air contains less moisture) • can be painted after drying • the content of zinc in the dry film up to 90%.

**APPLICATIONS:** corrosion protection of standard exhaust pipes, elements of car body and chassis and all kinds of pipe systems and steel structures.



spray 500 ml
12
1008
354

### CX80 PROTECTOR METAL

**Professional product for anti-corrosive protection with very good water displacing properties.**

**PROPERTIES:** very good water displacing properties and resistant to moist air • creates a thin layer of soft, non-drying protective film • provides protection for 3 months during outdoor storage and 6 months when stored outdoors in roofed areas • odour-free.

**APPLICATION:** for temporary anti-corrosive protection of goods in metal processing industry and manufacture of galvanic coatings.



spray 500 ml	5 l	package
12	1	cardbox (quantity)
1008	-	pallet (quantity)
869	855	barcode

### CX80 ALUCYNK SPRAY

**Fast-dry anticorrosive.**

**PROPERTIES:** high content of zinc and aluminium – 99% • high anti-abrasion and atmospheric conditions • perfect coverage • very efficient and easy to use • resistance to high temperatures (up to 490°C) • short dry-time • based on acrylic resin • silver color.

**APPLICATIONS:** long-lasting protection of metal surfaces against corrosion • mending the broken zinc elements i.e. gutter, roofs, fences and pipes • mending the cut, heat-fastened, and welded elements • after zinc, heat-fastening and welding corrections.



spray 500 ml
12
1008
781

### CX80 DRILLING AND THREADING OIL

**Oil for cutting ferrous and non-ferrous metals.**

**PROPERTIES:** very good anti-wear and EP properties • prolongs tool life • prevents from microroughness • provides very good surface finish (helps reducing production costs) • very good behaviour on a large scale of cutting parameters • low treatment cost (ecological cooling liquid) • low mist oil formation which improves work conditions.

**APPLICATIONS:** machining of hard and very hard steels (bearing steels), especially heat-resistant steel (NIMONIC and VASPALLOY) and titanium alloys (aviation and medical applications) • can also be used for low carbon steel and copper alloy • turning, threading, milling, cutting, deep drilling.



duospray 500 ml	5 l	25 l	package
12	1	1	cardbox (quantity)
1008	-	-	pallet (quantity)
782	292	318	barcode



### CX80 WAX FOR CLOSED SECTIONS

An anti-corrosive agent for protecting cavities of car bodies susceptible to corrosion.

**PROPERTIES:** long-term corrosion protection • penetrates rust and prevents its emergence • creeping properties • repels moisture • does not contain silicone.

**APPLICATIONS:** thresholds, door frames, girders, headlight housings in cars, trucks, and buses • as a general anti-corrosive agent for machines, machine parts, and equipment stored outside.



spray 500 ml
12
1008
864



### CX80 WAX FOR CHASSIS PROTECTION

Wax-based preparation with anti-corrosive effect for the corrosion protection of car chassis.

**PROPERTIES:** based on high quality wax (does not contain asphalt) • forms very flexible and tear-resistant protective coating • very high resistance to chipping caused by stone impact • excellent anti-corrosion properties, even with thin layers • does not react with rubber and plastics • forms a protective layer on chassis components, fenders, and wheel arches.

**APPLICATIONS:** to protect chassis in new cars and to supplement corrosion protection after bodywork and paint repairs • it is suitable for bare metal surfaces.



spray 500 ml	5 kg	package
12	1	cardbox (quantity)
1008	-	pallet (quantity)
907	48263	barcode



package  
cardbox (quantity)  
pallet (quantity)  
barcode



### CX80 BIKE CARE LINE • CHAIN LUBE DRY

**Dry bicycle chain lubricant. A versatile lubricant ideal for use in dry conditions and in dusty environments.**

**PROPERTIES:** leaves a dry and clean coating resistant to adhesion of dust and dirt • does not leave greasy layer • protects the lubricated components from rust and corrosion • it is not washed out by water • reduces friction and noise • resistant to extreme pressures • texture makes reaching hard-to-reach areas easier • easily penetrates the inside of the lubricated components and increases their durability.

**APPLICATIONS:** for use in all bicycle components that require lubrication e.g., chains, chain rings, derailleurs, etc. • protects components immediately after they have been cleaned.



duospray 500 ml
24
1008
48325

### CX80 BIKE CARE LINE • CHAIN LUBE WET

**Wet bicycle chain lubricant. High-class lubricant perfect for use in wet conditions.**

**PROPERTIES:** ensures long intervals (up to 300 km) between maintenance • resistant to harsh weather conditions • water-resistant • protects from corrosion • leaves a wet coating ensuring smooth operation and top performance of the drivetrain system (saving the cyclist's energy).

**APPLICATIONS:** for long runs without the need for re-lubrication • perfect for MTB marathons, cyclo-cross, road, and track cycling • it is recommended to degrease the chain and to remove dirt and other lubricants, if any, before first use.



duospray 500 ml	package
24	cardbox (quantity)
1008	pallet (quantity)
48326	barcode

### CX80 BIKE CARE LINE • CHAIN CLEANER

**Product for cleaning bicycle chains. Enables quick removal of lubrication residue and dirt from the drivetrain system, brake discs, and other components of a bicycle.**

**PROPERTIES:** repels water • quickly evaporates and does not leave sediment • does not require additional rinsing with water • dries quickly.

**APPLICATIONS:** quick and efficient cleaning and degreasing of metal surfaces • perfect also for cleaning brake discs, derailleurs, and threaded components.



spray 500 ml
12
1008
48328

### CX80 BIKE CARE LINE • FRAME CLEANER

**Product for cleaning bicycle frames. A comprehensive product for effective cleaning of bicycle frames.**

**PROPERTIES:** contains cleaning, anti-corrosion, and anti-static substances • cleans quickly and efficiently • does not contain harmful solvents (environmentally-friendly ingredients).

**APPLICATIONS:** for all kinds of surfaces used in bicycles: titanium, aluminium, glass fibre, chromium, rubber, leather, plastic, etc.



spray 500 ml	package
12	cardbox (quantity)
1008	pallet (quantity)
48327	barcode

### CX80 CAR CARE LINE • COCKPIT PROTECTOR • TEFLON™

**PROPERTIES:** anti-static – dust repellentsheen • fresh and delicate scent • long-lasting aesthetic effect • restoration effect • neutral to the user and the environment.

Teflon™ is a registered trademark of The Chemours Company FC, LLC. (DuPont), used under license by CX80.



spray 600 ml
12
840
640

### CX80 CAR CARE LINE • TIRE PROTECTOR • TEFLON™

**PROPERTIES:** anti-static • restoration effect – delays rubber aging • long-lasting aesthetic effect – resistant to washing or rinsing • does not leave streaks or stains • no need to wipe the tires with a cloth or sponge • deep-black effect • neutral to the user and the environment.

Teflon™ is a registered trademark of The Chemours Company FC, LLC. (DuPont), used under license by CX80.



atomizer 600 ml	package
12	cardbox (quantity)
660	pallet (quantity)
783	barcode

### CX80 CAR CARE LINE • RIM CLEANER

**PROPERTIES:** safe on all rim types (metal and aluminium) • highly effective surface active (no use of brush, sponge etc. required) • easily rinsed • does not leave streaks • neutral for rubber, lacquer and chrome surfaces • anti-corrosive (active with vehicle break-systems) • neutral to the user and environment.



atomizer 600 ml
12
660
784

### CX80 CAR CARE LINE • INSECT REMOVER

**PROPERTIES:** safe on all surfaces (chrome, glass, lacquer, plastic) • ease of use • highly fast and effective • reduces dirt adherence • fresh and nice scent • neutral to the user and environment.



atomizer 600 ml	package
12	cardbox (quantity)
660	pallet (quantity)
785	barcode



**CX80 Polska**

Chotów 7a, 63-460 Nowe Skalmierzyce  
tel./fax +48 62 762 46 07, tel. +48 62 762 33 57  
e-mail: [cx80@cx80.pl](mailto:cx80@cx80.pl)  
[www.cx80.pl](http://www.cx80.pl)

**CX80 GmbH**

[www.cx80.de](http://www.cx80.de)

**[www.cx80.pl](http://www.cx80.pl)**

**CX80 Polska**

Chotów 7a, 63-460 Nowe Skalmierzyce  
tel./fax +48 62 762 46 07, tel. +48 62 762 33 57  
e-mail: [cx80@cx80.pl](mailto:cx80@cx80.pl)  
[www.cx80.pl](http://www.cx80.pl)

**CX80 GmbH**

[www.cx80.de](http://www.cx80.de)

**[www.cx80.pl](http://www.cx80.pl)**